

# Hazardous Locations

## Explosion Proof, Weather Proof - Manual Pull Stations

### RMS-EXWP



The RMS Series explosion proof weather proof pull stations are constructed of the finest materials and workmanship available. Made of high-strength metal die-cast alloy, the RMS series explosion proof weather proof pull stations come standard options similar devices offer separately. With a UL rating of class I group B (hydrogen) C & D, class II groups E, F, G, class III and an outdoor rating of type 4X, these stations offer unmatched placement flexibility. Terminal block connections, D.P.D.T. contacts @ 10 amps, meets most electrical requirements indoors or out.

Having a "conventional" pull station design, they offer easy identification. Optionally offered is a key lock reset (different key codes available), lift and pull dual station cover, and break glass adapter with solid brass hammer and chain. (Break glass adapter cover design allows glass to fall out before activating).

The different RMS series pull stations are also offered in special colors: Orange, Yellow, Blue etc. with any information (in any language) silk screened on the dual action lift and pull cover or engraved directly to the station allowing the device to be custom tailored for each and every application including private labeling.

#### **Standard Features:**

- UL rating Class I group B, C, D.  
Class II group E, F, G.  
Class III.  
Type 4X outdoor.
- D.P.D.T. switch rated @ 10 amps.
- Terminal block connections.
- Metal construction.
- Mounting hardware & instructions.

#### **Optional Features:**

- Key lock reset (optional key codes).
- Color finishes (Orange, Yellow, Blue etc.).
- Dual action lift and pull cover.
- Custom silk screening or engraving (in any language).
- Private Labeling.
- Extension back box (junction).

**MADE IN THE U.S.A.**



(LP)



(LP)

*Any color or wording available!*



(LP)

**ELECTRICAL SPECIFICATIONS:**

Contacts: D.P.D.T. (double pole double throw).  
 Contact Rating: 10 amps @ 125/250 VAC.  
 Wire AWG: 12 to 22 AWG.  
 Wiring: Terminal black connections (6-32 w/sem plate).


**RATING:**

<b>Class</b>	<b>Group</b>
I	B, C, D
II	E, F, G
III	
Type 4X (outdoor).	

**ACCESSORIES:**

LP Lift and Pull (dual action).  
 DAH Break glass adapter (dual action).  
 KL Key lock reset (specify key code).  
 EXBB Extension Back Box.

**Note:** (LP and DAH options readily install to all basic units).

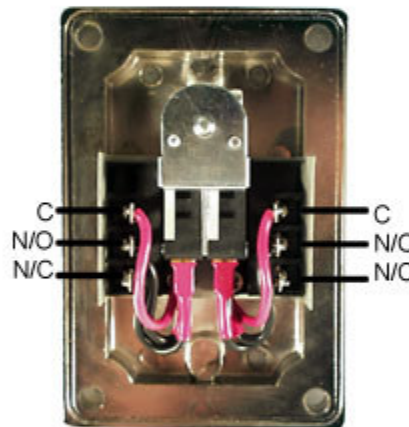

**OPTIONS:**

- Custom Colors (specify color).
- Custom silk screening (Lp and DAH glass plate).
- Custom engraving of station (specify wording and location).
- Key operated (high security), (KO).
- Private Labeling

**ORDERING INFORMATION:**

RMS-EXWP -- ( KL ) -- ( LP ) -- (Special Processing )

Basic Station

Options

- (KL) Key Lock Reset.
- (KO) Key Operated (note: KO version approved for indoor use only).
- (LP) Lift and Pull
- (DAH) Break Glass Adapter.

Special Processing: Silk Screening, Color Option, Engraving etc.



(DAH)



(KO)

**MADE IN THE U.S.A.**