

SP SERIES

MANUAL FIRE ALARM STATION

U. L. LISTED S-2040

CALIFORNIA STATE FIRE MARSHALL 7150-512:6

GENERAL:

The SP Series Manual Stations are a highly flexible station. With no options the SP-1 is a simple non-code non-break glass station. By adding various options the SP can be transformed to break glass, double action, pre-signal station with fire fighter's telephone jack.

FEATURES:

- Cast Metal Construction
- Key lock for test and reset
- Recessed pull lever (locks in protruding position when pulled)

OPTIONS:

- Concealed key switch for pre-signal systems
- Double action device with hammer
- LED Alarm indicator
- Fireman's telephone jack


SPECIFICATIONS:

- Dimensions: 3 3/4" W x 5 3/16" H x 3 1/2" D
- Weight: 1.25 lbs.
- Electrical: Key switch 120 VAC @ 10 AMP
Toggle switch 125 VDC @ 3 AMP
Phone Jack 48 VDC @ .01 AMP
- Mounting: Mounts to a single gang switch ring on Electrical junction box.



MODEL SP-1 (SINGLE POLE)
MODEL SP-2 (DOUBLE POLE)

MODEL	DESCRIPTION
SP-1	Single Pole Pull Station
SP-2	Double Pole Pull Station
TP	Add Suffix for Phone Jack
PS	Add Suffix for Key Switch
L	Add Suffix for L.E.D.
DAH	Add Suffix for Double Action w/Hammer

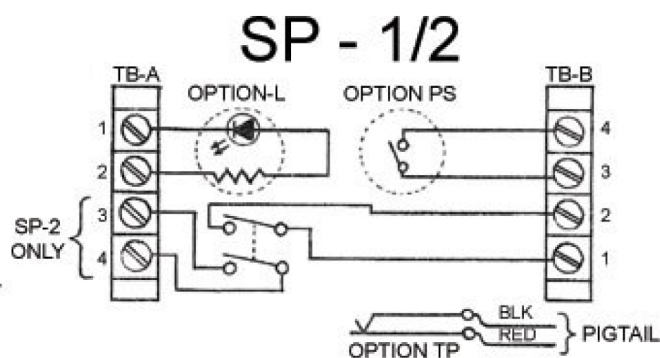

OPERATION:

Model SP has its pull handle in the upright position and set to the actuate the toggle switch in the standby condition. An alarm condition can be obtained by simply pulling down the lever which in turn causes the switch contacts to transfer and an alarm condition is established.

MADE IN THE U.S.A.

2700 Junipero Ave Signal Hill CA, 90755
Tel: (562) 529-5100 Fax: (562) 529-5102
www.rsgsecurity.com




SPECIFICATIONS:

Electrical:	switch	---	120 VAC at 3 amp.	
	keyswitch	---	120 VAC at 10 amp.	
	phone jack	---	48 VDC at .10 amp.	
	LED	---	24 VDC at .02 amp.	
	station		---	3-3/4" Width
				5-3/16" Height
			3-1/2" Depth	
DAH		---	3-7/8" Width	
			3-1/4" Height	
			5/8" Depth	
Cover		---	3-7/8" Width	
			4-1/8" Height	
			1-1/8" Depth	
Material:	station	---	die-cast metal alloy	
	DAH, LP	---	18 ga. painted steel	
Weight:	station	---	20 ounces	
	DAH, LP	---	5 ounces	

ORDERING INFORMATION:

Options:	TP	---	Standard 1/4 inch phone jack for portable telephone handset communications.
	TB	---	Terminal block field connections.
	LED(x)	---	(R)ed, (G)reen or (A)mber light emitting diode for auxilliary visual indications.
	PS	---	Single pole key switch for auxilliary switching functions.
	DAH	---	Break glass dual action adapter with hammer and chain.
	LP	---	Lift and Pull dual action adapter.
	KO	---	Key Operated manual station.

NOTE: options TP, TS and LED are available only with TB option, SP stations will be supplied with pigtail leads if not specified otherwise. Option (DAH) or (TP) or (KO and PS) or (KO and DAH) or (KO) or (KO and LED) are mutually exclusive and cannot be ordered together.

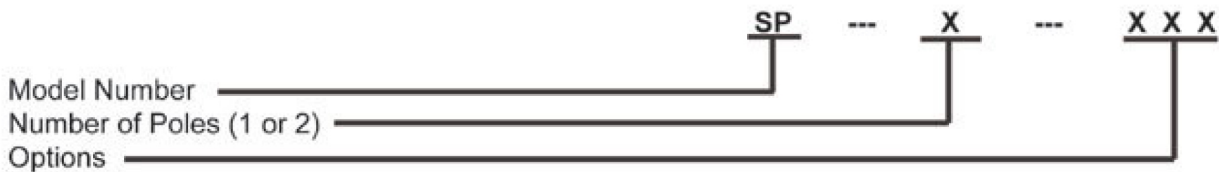

SP Station Accessories:
 SP-WB --- Rain and Dust resistant enclosure.
 SP-BB --- Surface mount die-cast red finish back-box.

SP-WP Shown w/ SP Station



SP-X-KO



**MADE IN THE
U.S.A.**